


DLPlus mini-trunking 60 x 20 and 75 x 20

profiles and finishing accessories

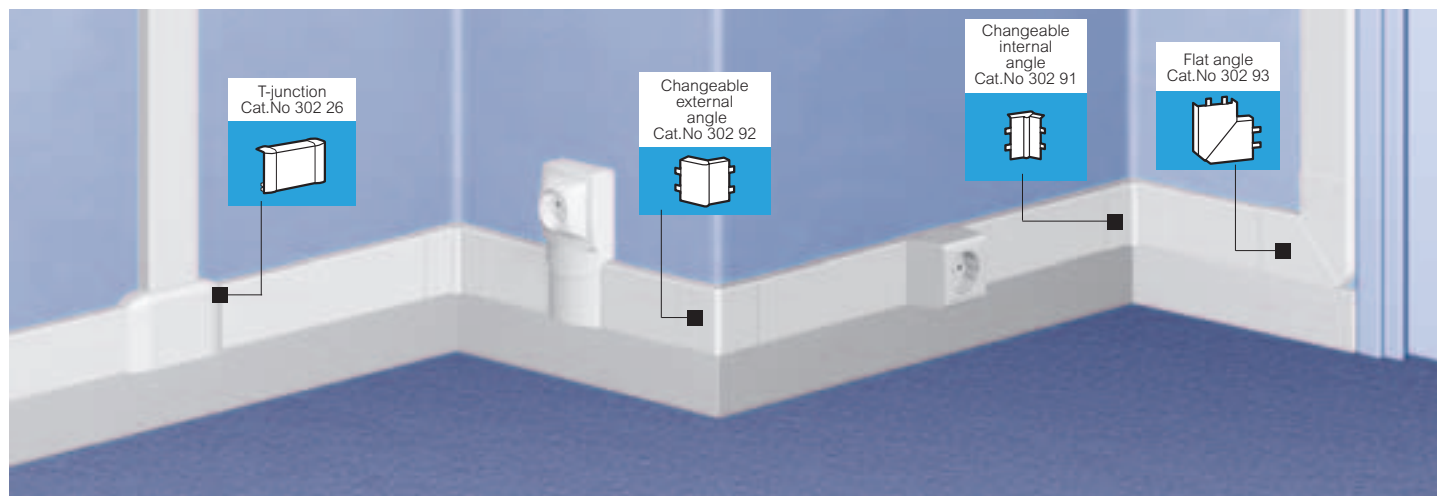


Selection chart (p. 686-687)
Wiring capacity chart (p. 692)

Pack	Cat.Nos		3-compartment mini-trunking
32 ⁽¹⁾ 20 ⁽¹⁾	60 x 20 301 14	75 x 20 300 33	3 compartments for distribution of high and low currents Length 2.10 m White

Pack	Cat.Nos		Finishing accessories
10	60 x 20 302 90	75 x 20 303 00	End cap
10	302 91	303 01	Changeable internal angle
10	302 92	303 02	Changeable external angle
10	302 93	303 03	Flat angle
10	302 26		Flat T-junction on two planes (wall and ceiling)
1	328 05		Junction to floor duct

Pack	Cat.Nos		Oteo frames
10	314 08		Supplied with end cap and divider for separation of currents Vertical or horizontal mounting Installation alongside the mini-trunking 1 gang
5	314 18		2 gang

Pack	Cat.Nos	Mosaic frames
10	316 45	Adaptors for mounting Mosaic frame at the end of the mini-trunking For 60 x 20 mini-trunking
10	316 48	For 75 x 20 mini-trunking
10	317 07	Adaptors for mounting Mosaic frame alongside the mini-trunking For Mosaic frames Cat.Nos 316 11 and 316 12
5	317 08	For Mosaic frames Cat.Nos 316 13 and 316 21
5	317 09	For Mosaic frames Cat.Nos 316 14 and 316 22



Frames for

- Mosaic
- BS wiring accessories
- 60 mm fixing centers wiring accessories

see p. 691

(1) Number of meters in pack