

Sliding Shelves / D=600 / D=800 mm



FEATURES

4 fixing points fit at the sides or rear and front 19" mounting angles
Suitable with ESTAP 19" profiles
Vented

COMPLIANCES

UL and cUL
Load Carrying Capacity: 25 kg
Surface Treatment: Fosfat coating
Painting: Ral7035 / Ral9005

STANDARDS


ISO 9001:2000
TSE:EN 61587-1 Mechanical Structures For Electronic Equipment - Tests For IEC 60917 And IEC 60297
Climatic and Environment: EN 61587-1/4.2, IEC60068-2-1, IEC60068-2-2, IEC60068-2-30,
Static Mechanical Load Lifting: EN61587-1/5.2.1
Static Mechanical Load Stiffness: EN61587-1/5.2.2
Dynamic Mechanical Load Vibration and Shock, Impact: EN61587-1/5.3.1,EN61587-1/5.3.3,IEC60068-2-6, IEC60068-2-27,
Earth Bond: EN61587-1/6.2
Flammability: EN61587-1/6.3

Material Definition and Properties, Thicknesses and Shipment Configuration

Part Definition	Material thickness	Material definition & properties	Shipment Configuration
Sliding Shelf	1,20 mm	DIN EN 10130 - 99 EREGLI DC-01 6112 CRS	1 ea.
C-rail	1,50 mm	DIN EN 10130 - 99 EREGLI DC-01 6112 CRS	2ea.

Sliding Shelves D=600 mm

TECHNICAL DRAWINGS

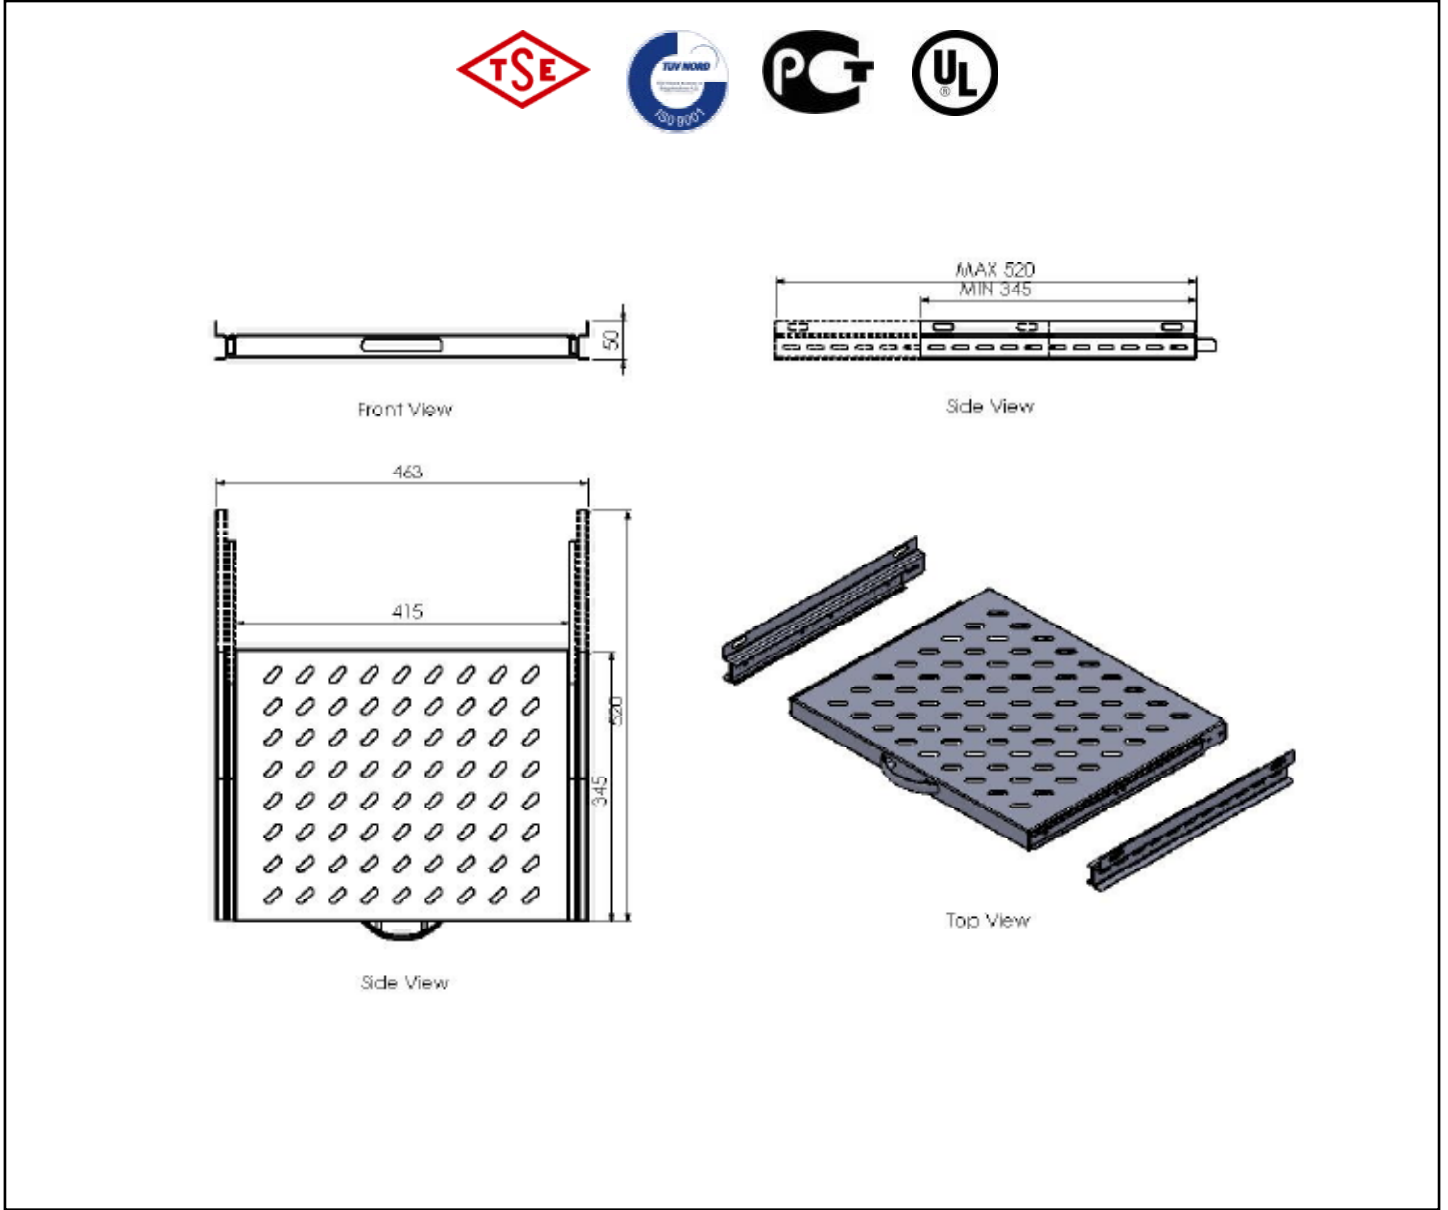


Sliding Shelves		
Order No	Product Definition	Dimensions (wxdxh) mm
M44HRK60	Sliding shelf vented enclosure depth=600 mm	465x345x30

Shipping Data				
Order No	Quantity	Shipping Dimension (palette) WxHxD	Net Weight (kg)	Gross Weight (kg)
M44HRK60	7	545x425x400	18,830	19,500

Sliding Shelves D=800 mm

TECHNICAL DRAWINGS

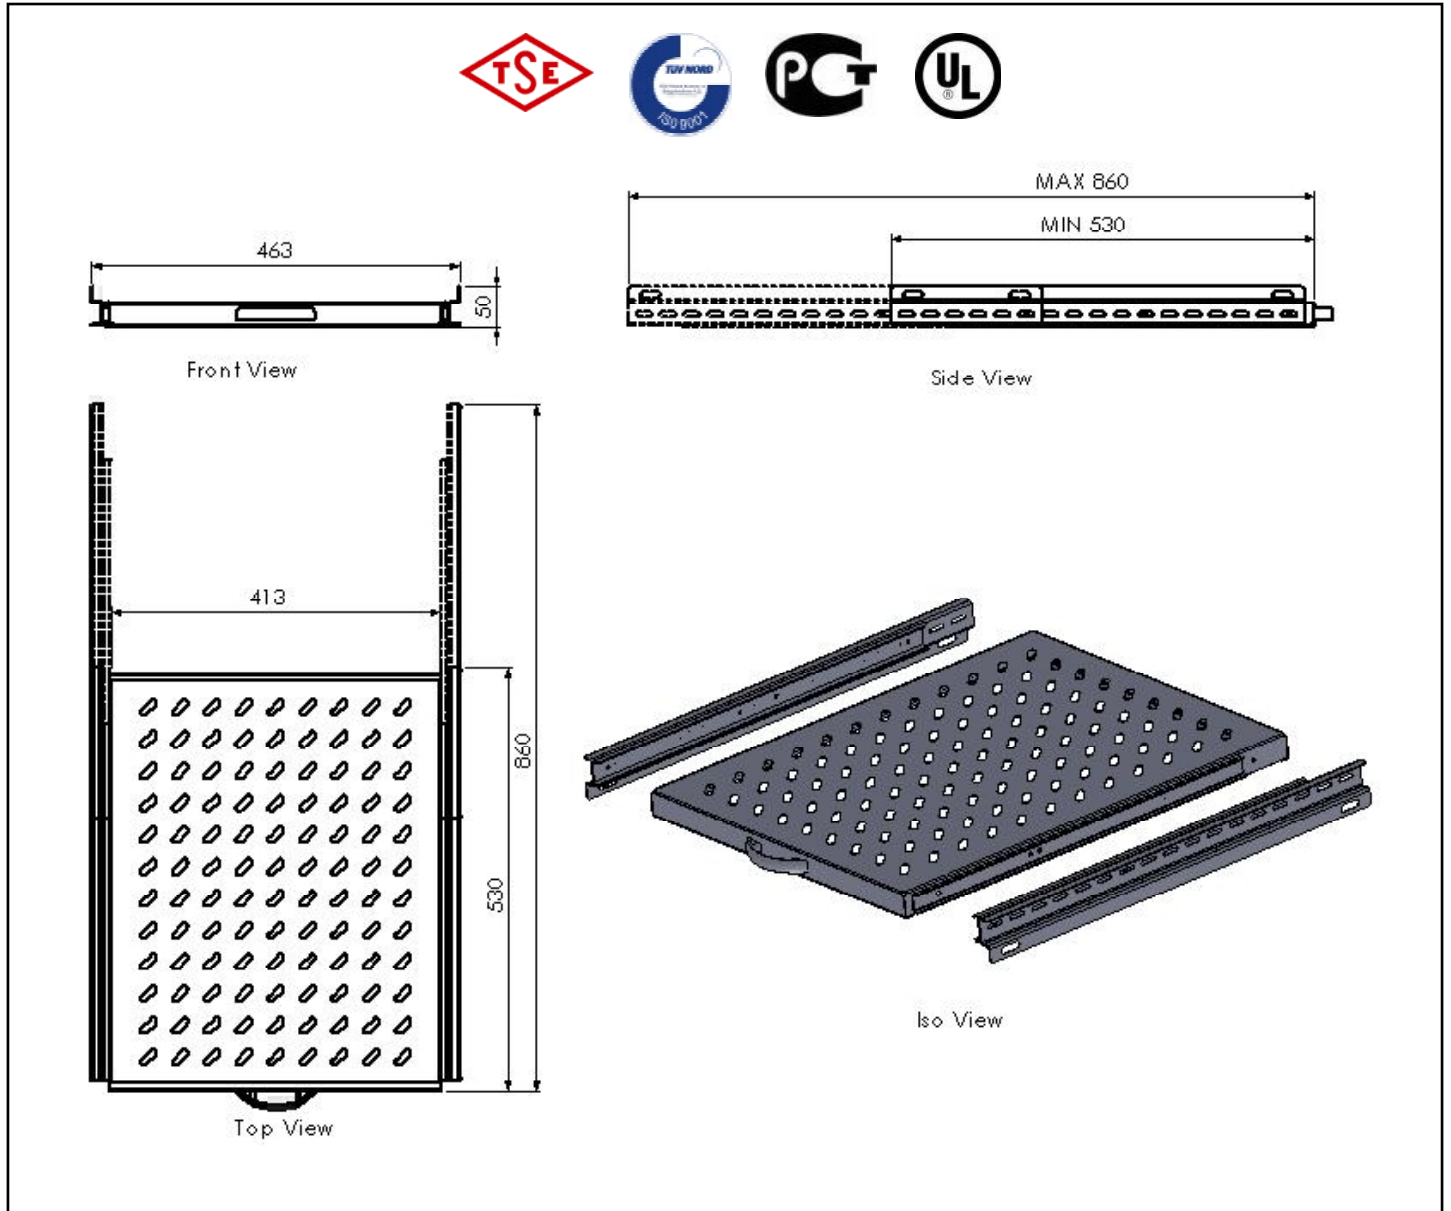

Sliding Shelves		
Order No	Product Definition	Dimensions (wx dxh) mm
M44HRK80	Sliding shelf vented enclosure depth=600 mm	465x345x30

Shipping Data				
Order No	Quantity	Shipping Dimension (palette) WxHxD	Net Weight (kg)	Gross Weight (kg)
M44HRK80	7	540x440x610	27,860	29,000