


System cables

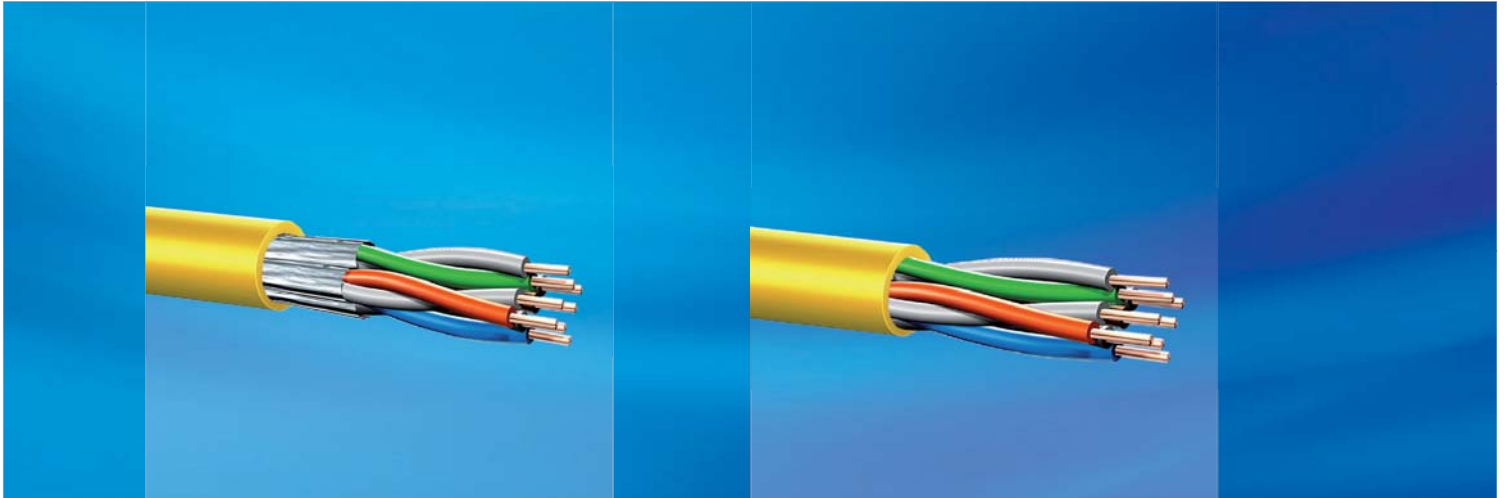

MegaLine®
E2-45 U/F - S₂P₁A₂C₄E₂
 Category 6

Product description:

- Type: KS-02YSH 4x2xAWG 23/1 PIMF
- Performance: better than category 6 acc. EN 50288 and IEC 61156, very good NEXT, low SKEW, Bandwidth 450 MHz
- Conductor: Bare copper wire, AWG 23/1
- Insulation: Cellular-PE
- Individual screen: Aluminium-bonded polyester tape
- Wrapping: plastic foil (optional) with underlayered tinned copper drain wire
- Outer sheath: halogen-free, flame retardant compound
- Colour code: wh/bu, wh/or, wh/gn, wh/bn
- Colour outer sheath: yellow, RAL 1021

Article no.: 7KS60005
 Pcs. per packing unit: Drum 1,000 m

MegaLine®
E2-30 U/U - S₂P₁A₂C₄E₁
 Category 6

Product description:

- Type: KS-2YH 4x2xAWG 23/1
- Performance: better than category 6 acc. EN 50288 and IEC 61156, Bandwidth 300 MHz
- Conductor: bare copper wire, AWG 23/1
- Insulation: PE
- Wrapping: 4 pairs separated by a cross element
- Outer sheath: halogen-free, flame retardant compound
- Colour code: whbu/bu, whor/or, whgn/gn, whbn/bn
- Colour outer sheath: yellow, RAL 1021

Article no.: 7KS60002
 Pcs. per packing unit: Drum 1,000 m / box 305 m