


White  
length: 2 m

# fully assembled DLP trunking 50 x 105


trunking and fittings

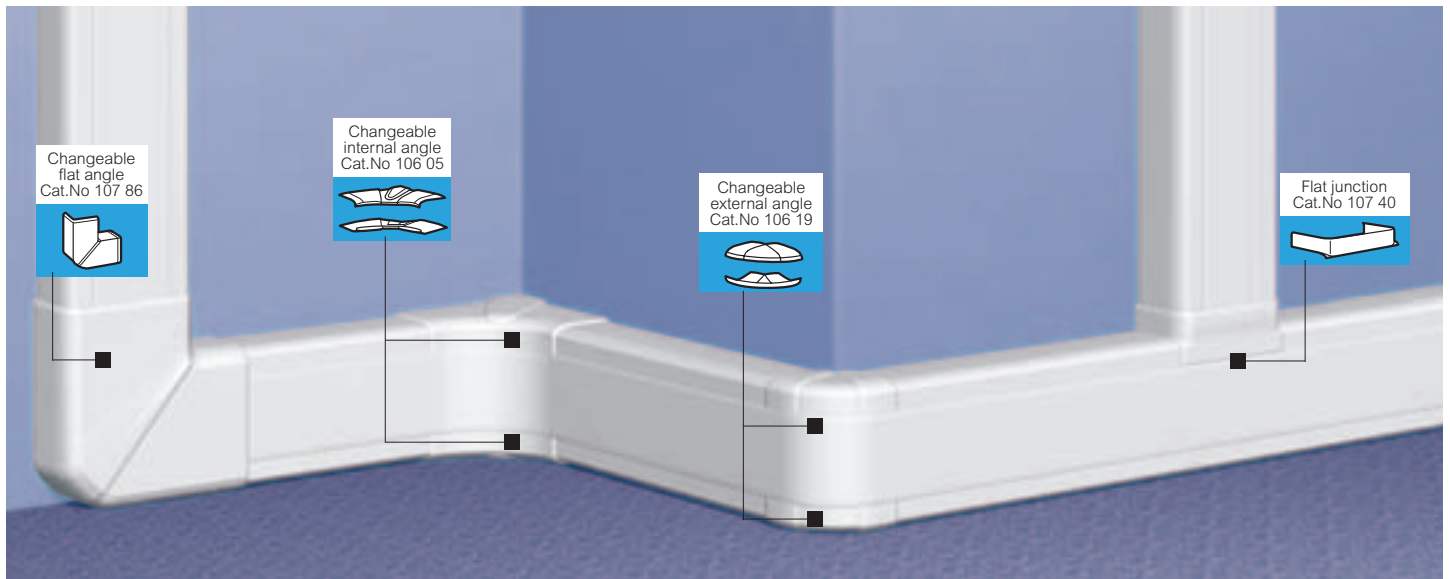

Selection chart (p. 706)  
Wiring capacity chart (p. 726)

Conform to NF C 68-104

| Pack              | Cat.Nos | Fully assembled trunking  |
|-------------------|---------|---|
| 12 <sup>(1)</sup> | 104 24  | <b>Trunking without partition</b><br>Supplied with:<br>– one 50 x 105 mm body<br>– one flexible cover 65 mm wide<br>Fits onto the whole trunking including in internal and external angles<br>Suitable for an optimized installation with Mosaic wiring accessories by the use of Mosaic sockets with support<br>Length 2 m |
| 24 <sup>(1)</sup> | 105 82  | <b>Partition</b><br>Separation partition<br>Length 2 m  |
| 20                | 106 96  | <b>Joints</b><br>Body joint<br>For aligning bases during installation   |
| 10                | 108 01  | Cover joint for 65 mm cover   |



| Pack | Cat.Nos | Junctions  |
|------|---------|--|
| 5    | 107 39  | <b>Flat junctions</b><br>For tap-off to a 80 mm wide branch  |
| 5    | 107 40  | For tap-off to a 105 mm wide branch  |
| 5    | 107 65  | <b>Angled junction</b><br>For tap-off in an internal angle to 35 x 80, 35 x 105, 50 x 80 and 50 x 105<br>For use with internal angle Cat.No 106 05 |
| 50   | 106 81  | <b>Accessories</b><br>Clip   |
| 100  | 308 81  | Base for clamp   |

Installation accessories (p. 724)

| Pack | Cat.Nos | Angles and end cap   |
|------|---------|--|
| 10   | 106 05  | <b>Internal and external angles</b><br>Include the 2 components for the top and bottom of the trunking on which the flexible cover is fitted<br>Changeable internal angle, from 85° to 95° for 50 x 105 mm trunkings |
| 10   | 106 19  | Changeable external angle, from 60° to 120° for 50 x 105 mm trunkings  |
| 10   | 107 86  | <b>Flat angle</b><br>90° flat angle  |
| 20   | 107 00  | <b>End cap</b><br>Left or right end cap  |

**Other functions**

see p. 724

(1) Number of meters in pack