


LAN Cable

Category 8

HELUKAT® 1200

S/FTP

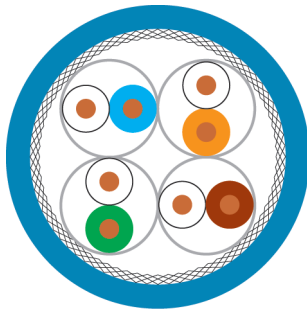


Cable structure

Inner conductor Ø: 0,64 mm
 Conductor material: Copper, bare
 Core insulation: Foam-skin-PE
 Core colours: wh/bu, wh/og, wh/gn, wh/bn
 Separator: -
 Screen over stranding element: Al-Foil
 Screen 1 over stranding: Cu braid
 Screen 2 over stranding: -
 Outer sheath material: FRNC
 Outer diameter: app. 7,7 mm
 Outer sheath colour: Blue similar to RAL 5015

S/FTP 4x2xAWG 22/1 FRNC

Electrical data

Characteristic impedance: 100 Ohm ± 15 Ohm at 1 to 100 MHz
 100 Ohm ± 20 Ohm at 101 to 1200 MHz
 Loop resistance: 120 Ohm/km max.
 Mutual capacitance: 43 nF/km nom.
 Rel. propagation velocity: 79 %

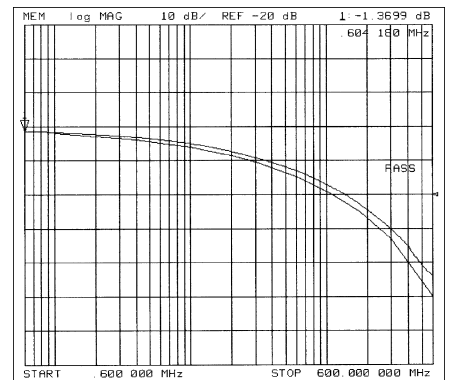

Typical values


Frequency (MHz)	10	16	62,5	100	200	300	600	1000	1200
Attenuation (db/100m)	4,9	6,3	12,7	16,3	23,5	29,4	42,8	53,0	59,0
Next (db)	100,0	100,0	95,0	93,0	90,0	87,0	81,0	78,0	77,0
ACR (db)	95,1	93,7	82,3	76,7	66,5	57,6	38,2	25,0	18,0

Technical data

Weight: app. 66 kg/km
 bending radius, repeated: 72 mm
 Operating temperature range min.: -20°C
 Operating temperature range max.: +60°C
 Caloric load, approx. value: 0,70 MJ/m
 Copper weight: 40,00 kg/km

Norms

Acc. to ISO/IEC 11801, Acc. to EN 50173, Acc. to EIA/TIA 568-A, Category 8 (draft),
 Flame-retardant acc. to IEC 60332-3, Smoke density acc. to IEC 61034, Halogen-free acc. to 60754-2, Corrosiveness acc. to EN50267-2-3

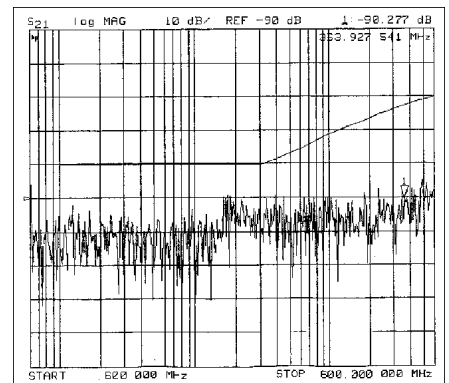

Application

HELUKAT® 1200 data cables are used in the tertiary, but also in the secondary level of a network. They are characterized by large performance reserves and outstanding performance. They can be used to implement services such as Gigabit Ethernet, Fast Ethernet, Ethernet, ATM155, FDDI, token ring 4/16 Mbit/s or ISDN absolutely trouble-free. Likewise, the mechanical characteristics are perfectly suited for the application in tight cable channels and platforms due to their optimized construction.

Part no.

81699, S/FTP 4x2xAWG 22/1 FRNC (S-FTP)

Dimensions and specifications may be changed without prior notice.