

19" Euroline Cabinet (800x800 mm)



FEATURES

Secure, tempered front door with left and right metal frames with handle type locks. 5 different height, 1 different depth, 1 different width
 Top cover is suitable for fan units and brushed cable entry
 Open/close function, lockable, removable side panels and front/rear doors
 Welded cornes; sturdy and rugged construction
 Bottom case is completely open for large cable entries
 Rugged steel for 19" mounting angels
 Easy to transport, %100 protection for any transport damages
 Easy to assemble
 Aesthetic look
 High quality production
 Reduce %50 shipping cost
 Safe to transport, re-transport with cargo
 Reduce re-transportation and cargo costs, vertical and ready with self pallette
 Easy to carry, half of cabinet. All in 2ea. Sperate cardboard box for easy to carry.

STANDARDS

ISO 9001:2000
 TSE:EN 61587-1 Mechanical Structures For Electronic Equipment - Tests For IEC 60917 And IEC 60297
 Climatic and Environment:EN 61587-1/4.2, IEC60068-2-, IEC60068-2-2, IEC60068-2-30,
Static Mechanical Load Lifting: EN61587-1/5.2.1
Static Mechanical Load Stiffness: EN61587-1/5.2.2
Dynamic Mechanical Load Vibration and Shock, Impact: EN61587-1/5.3.1, EN61587-1/5.3.3, IEC60068-2-6, IEC60068-2-27,
Earth Bond: EN61587-1/6.2
Flammability: EN61587-1/6.3
Degrees Of Protection Provided By Enclosures (Ip Code): IP20 or IP55, EN61587-1/6.4

COMPLIANCES


UL and Cul
Load Carrying Capacity: 400 kg
Surface Treatment: Fosfat coating
Painting: Ral7035 / Ral9005

Material Definition and Properties, Thicknesses and Shipment Configuration

Part Definition	Material thickness	Material definition & properties	Shipment Configuration
Top Cover	1,2 mm	DIN EN 10130 - 99 EREGLI DC-01 6112 CRS	1ea.
Upper Case	1,5 mm	DIN EN 10130 - 99 EREGLI DC-01 6112 CRS	1ea.
Bottom Case	1,2 mm	DIN EN 10130 - 99 EREGLI DC-01 6112 CRS	1ea.
Front Door	1,5 mm	DIN EN 10130 - 99 EREGLI DC-01 6112 CRS & 4mm SECURE AND TEMPERED GLASS AND LOCK	1ea.
19" mounting angles	1,5 mm	DIN EN 10130 - 99 EREGLI DC-01 6112 & GALVANIZED COATING	4ea. (2ea. at front , 2ea. at rear)
Rear Door	1,2 mm	DIN EN 10130 - 99 EREGLI DC-01 6112 CRS	1ea.
C-rails	1,5 mm	DIN EN 10130 - 99 EREGLI DC-01 6112 & GALVANIZED COATING	6ea.
Side Doors	1,2 mm	DIN EN 10130 - 99 EREGLI DC-01 7122 CRS	2ea.

19" Euroline Cabinets and Racks (800x800mm)

TECHNICAL DRAWINGS

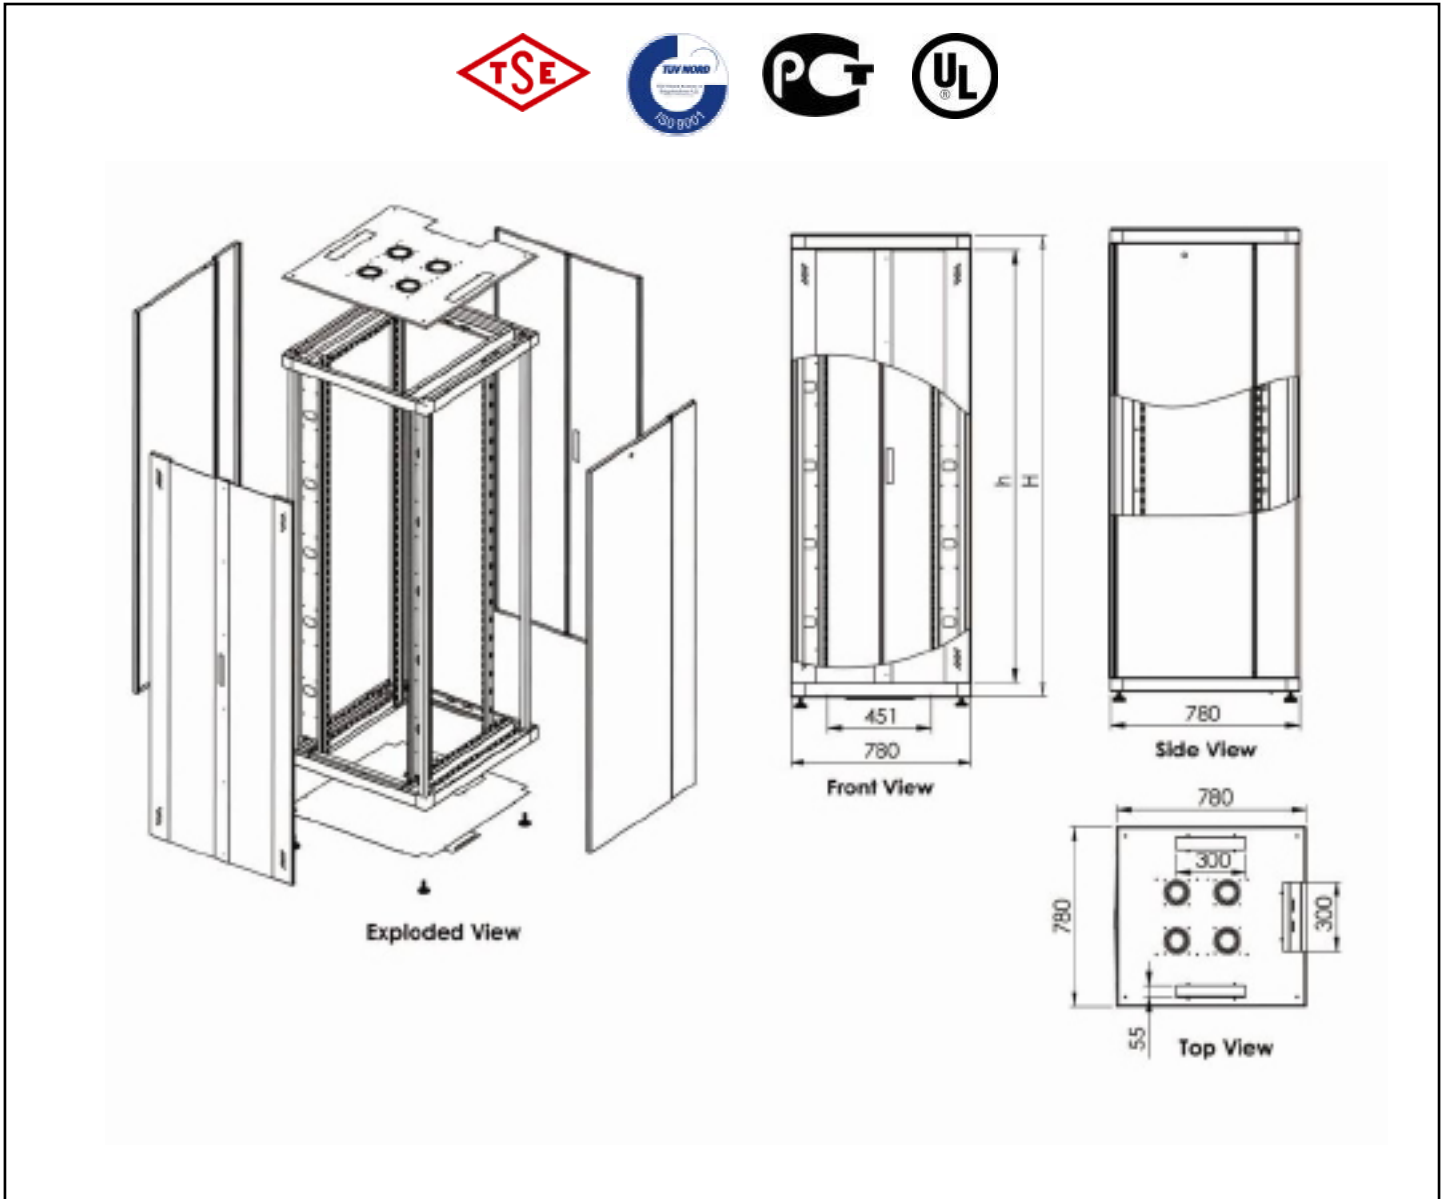

19" Euroline cabinets width=800 mm depth=800 mm			
Order No	U=44.45 (mm)	h= inside height(mm)	H=outside height(mm)
EU32U88	32	1447,0	1575,0
EU36U88	36	1625,0	1753,0
EU42U88	42	1892,0	2020,0

Shipping Data						
Order No	Quantity	Shipping Dimension (palette) WxDxH	Net Weight (kg)	Gross Weight (kg)	Shipping configuration depth (mm)	Max 19" depth
EU32U88	1	972x390x1800	108,00	115,00		720
EU36U88	1	972x390x1950	120,00	127,00		720
EU42U88	1	972x390x2300	142,82	163,00		720